


ANGLED FIBER PIGTAIL/PATCHCORD **J-AP**

Features

- ◆ Low insertion loss
- ◆ Low backreflection loss
- ◆ Custom-defined specifications
- ◆ Easy installation
- ◆ Environmentally stable

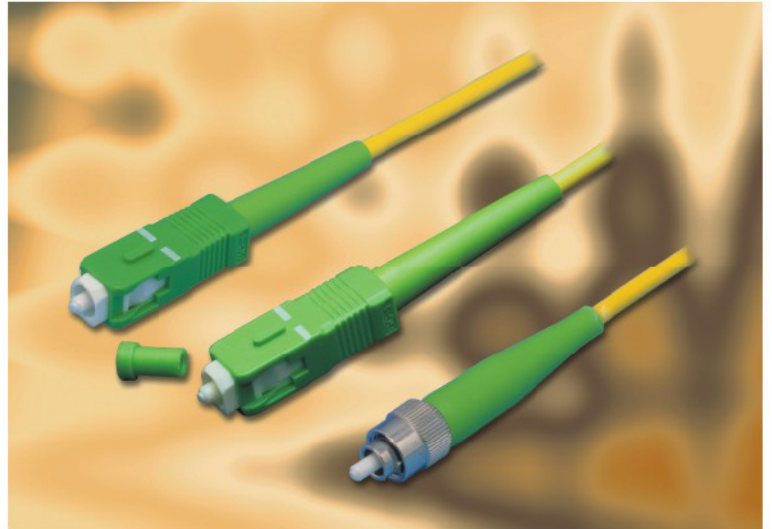

ITEM	Angled Fiber Pigtail / Patchcord	
Grade	S	H
Typical Insertion Loss, dB	0.15	0.30
Maximum Insertion Loss, dB	0.30	0.50
Typical Return Loss, dB	-67	-62
Minimum Return Loss, dB	-65	-60
Operating Temperature, °C	-40 ~ +75	
Storage Temperature, °C	-55 ~ +85	
Fiber Length	Any specified length	

J- **- AG -** /

■ Connector Type

AP.....FC/APC type
 AS.....SC/APC type
 HY.....Hybrid

■ Fiber Type

A.....Standard singlemode fiber
 B.....Dispersion-shifted fiber (check availability)
 X.....Others, please specify

■ Cable Type

C.....Simplex, coated fiber (250µm) Q.....Simplex, PVC 3.0mm cable
 D.....Duplex PVC cable (3.0mm) T.....Simplex, tight buffer cable (900µm)
 P.....Simplex, PVC 2.4mm cable X.....Others, please specify

■ Grade

S.....Super H.....High

■ Pigtail/Patchcord Length

Please specify in meters. If centimeters is desired, please start with "X", followed by 3 digits

■ Configuration

SG.....Pigtail DB.....Patchcord

■ Connector Type (for both ends)

AP..... FC/APC type
 AS.....SC/APC type
 NC.....None